



QXCCxI-x

INSTALLING THE COILED CABLE KID



Mounted kit QXCCMI-65

experience quality.

QXCCxI-x

COILED CABLE KIT FOR QX-SERIES MICROPHONE BOOMS

ASSEMBLY INSTRUCTION

The coiled cable kit comes assembled ready to mount.

The coiled cable kit contains:

- 1) The coiled cable incl. Switchcraft panel mount XLR connector with mounting ring (QSPBX-R)
- 2) The knurled ring nut for mounting onto the boom
- 3) An XLR-Female connector
- 4) Cable tie



Assembled coiled cable kit (mono wiring QXCCMI-80)

Fitting the coiled cable:

Remove the rubber foot at the bottom end.

Remove the rubber sleeve from the top end of the cable .

Thread the spiral cable through the thin segment till the cable is visible in the tip slot.

Push out the cable end with a screwdriver and pull out the cable till the first half turn of the spiral is outside the tip.

Insert the rubber sleeve into the tip slot.


Push the cable through the sleeve till it is tight.

experience quality.

QXCCxI-x

Note:

**Cable must wrap round ½ turn.
See picture.**

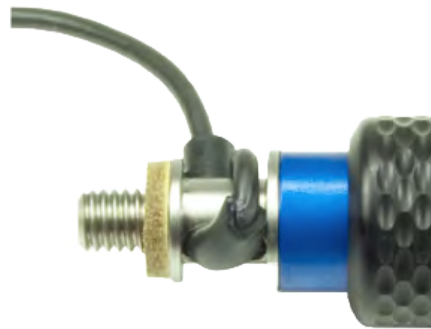

Wiring for mono (XLR-3F) is:

- 1 = ground / shield and bridged to plug housing
- 2 = yellow and brown | Audio +
- 3 = green and white | Audio -



Wiring for stereo (XLR-5F, grey cap) is:

- 1 = ground / shield and bridged to plug housing
- 2 = brown | Audio left +
- 3 = green | Audio left -
- 4 = yellow | Audio right +
- 5 = white | Audio right -

Mounting a coiled cable to the supplied connector:

Mount the connector to the mounting ring

Wire the connector as indicated above

Use a cable tie around the first two coils and the ground latch for strain relief.

Put the rubber-bumper over the end to protect the connector from dirt or damage when not in use...

Following kits are available:

QXCCMI-50	Coiled cable kit for QX 550	mono wiring XLR-3-pin
QXCCSI-50	Coiled cable kit for QX 550	stereo wiring XLR-5-pin
QXCCMI-65	Coiled cable kit for QX 565	mono wiring XLR-5-pin
QXCCSI-65	Coiled cable kit for QX 565	stereo wiring XLR-3-pin
QXCCMI-80	Coiled cable kit for QX 580	mono wiring XLR-5-pin
QXCCSI-80	Coiled cable kit for QX 580	stereo wiring XLR-3-pin
QXCCMI-100	Coiled cable kit for QX 5100	mono wiring XLR-5-pin
QXCCSI-100	Coiled cable kit for QX 5100	stereo wiring XLR-3-pin



Assembled coiled cable kit (stereo wiring QXCCSI-80)

MADE IN GERMANY

Ambient Recording GmbH

Schleissheimer Straße 181c | DE - 80797 Munich | vox +49 89 36005510-0 | fax +49 89 651855

www.ambient.de/en | info@ambient.de

© 2015, Ambient Recording GmbH